




QG LSOH Slotted Cable Trunking

Polycarbonate flame retardant 94V-0

-40 to +160°C

Pantone Colour code 428U,Grey

BS6853,NFPA130,DIN5510,NF16-101

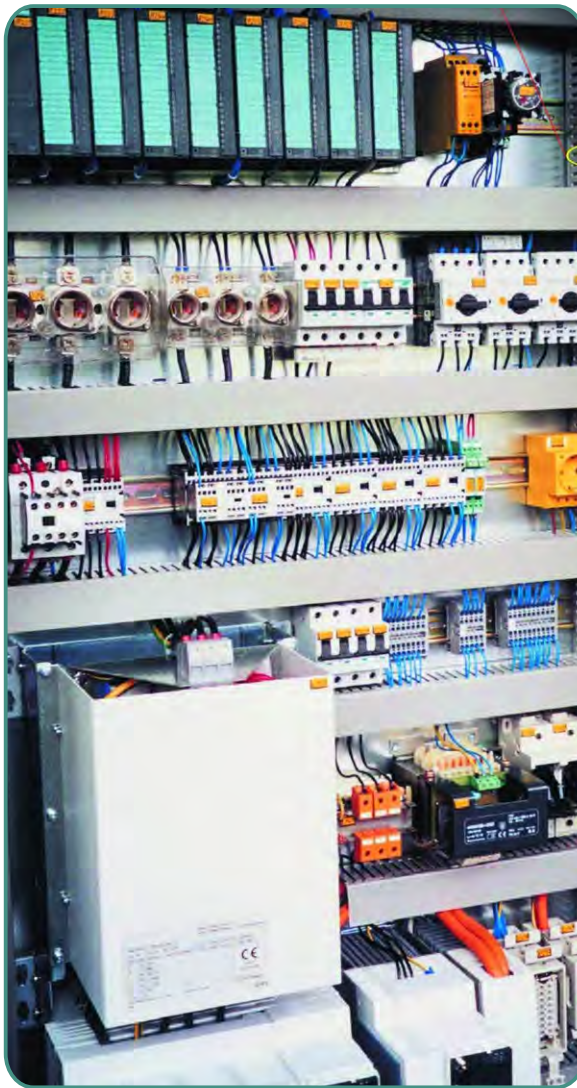

Changzhou Qiaoguang Electrical Appliance Co., Ltd

Tel: 86-519-8697 2201



Fax:86-519-8697 2990

Address: No. 223, West Hehai Road,
Changzhou, Jiangsu, PRC




QG Dimensions & Drawings

	High	Width	Slot Width(a)	Teeth Width(b)	(c)	Thickness(t)
Item.No.	mm	mm	mm	mm	mm	mm
DXC-2525	25	25	6	8	2.0	1.9+/-0.1
DXC-3030	30	30	6	8	7.0	1.9+/-0.1
DXC-3232	32	32	6	8	9.0	1.9+/-0.1
DXC-3535	35	35	7	8	5.0	1.9+/-0.1
DXC-4040	40	40	7	8	10.0	1.9+/-0.1
DXC-4060	40	60	7	8	10.0	1.9+/-0.1
DXC-5020	50	20	7	8	10.0	1.9+/-0.15
DXC-5025	50	25	7	8	10.0	1.9+/-0.15
DXC-5030	50	30	7	8	10.0	1.9+/-0.15
DXC-5035	50	35	7	8	10.0	1.9+/-0.15
DXC-5040	50	40	7	8	10.0	1.9+/-0.15
DXC-5045	50	45	7	8	10.0	1.9+/-0.15
DXC-5050	50	50	7	8	10.0	1.9+/-0.15
DXC-5055	50	55	7	8	10.0	1.9+/-0.15
DXC-5060	50	60	7	8	10.0	1.9+/-0.15
DXC-5080	50	80	7	8	10.0	1.9+/-0.15
DXC-6030	60	30	9	9	10.0	1.9+/-0.15
DXC-6040	60	40	9	9	10.0	1.9+/-0.15
DXC-6050	60	50	9	9	10.0	1.9+/-0.15
DXC-6060	60	60	9	9	10.0	1.9+/-0.15
DXC-6080	60	80	9	9	10.0	1.9+/-0.15
DXC-8025	80	25	10	11	16.0	2.0+/-0.2
DXC-8030	80	30	10	11	16.0	2.0+/-0.2
DXC-8035	80	35	10	11	16.0	2.0+/-0.2
DXC-8040	80	40	10	11	16.0	2.0+/-0.2
DXC-8045	80	45	10	11	16.0	2.0+/-0.2
DXC-8050	80	50	10	11	16.0	2.0+/-0.2
DXC-8055	80	55	10	11	16.0	2.0+/-0.2
DXC-8060	80	60	10	11	16.0	2.0+/-0.2
DXC-8080	80	80	10	11	16.0	2.0+/-0.2
DXC-80100	80	100	10	11	16.0	2.0+/-0.2
DXC-80120	80	120	10	11	16.0	2.0+/-0.2

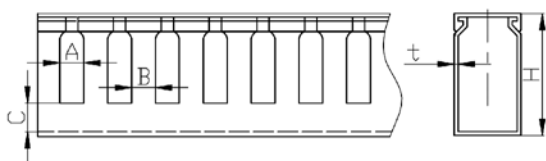

60mm series and below

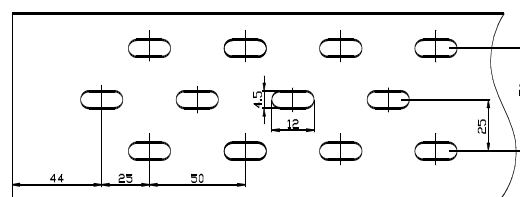

80mm series

Changzhou Qiaoguang Electrical Appliance Co., Ltd
 Tel: 86-519-8697 2201
 Fax:86-519-8697 2990
 Address: No. 223, West Hehai Road,
 Changzhou, Jiangsu, PRC