



QG Flame Retardant Wrapping Band




Excellent in insulation and binding strength, custom length on request

Widely used in wire routing

PE (black and white)

-20 to + 80°C

Flame retardant, low smoke zero halogen, non-flammable class 94V-0

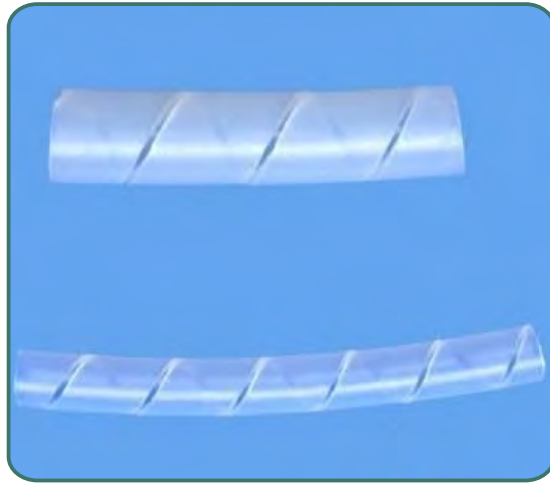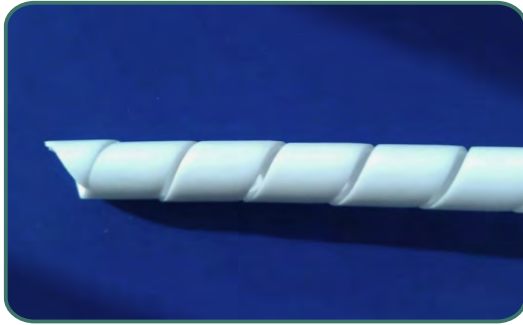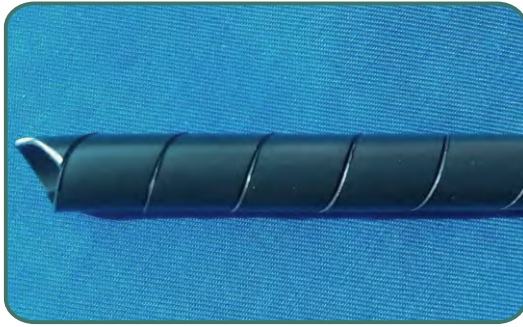

Model	Inner Diameter (mm)	Outer Diameter (mm)	Screw Length (mm)	Wrapping Range (mm)	Thickness (mm)	Packing (m)
ZCG-4	2.8	4	5.3	4-10	0.6±0.1	10
ZCG-6	4.6	6	6.8	6-20	0.7±0.1	10
ZCG-8	6.4	8	8.8	8-25	0.8±0.1	10
ZCG-10	8	10	10.2	10-30	1.0±0.1	10
ZCG-12	9.6	12	12.5	12-35	1.2±0.1	10
ZCG-14	11.4	14	13.6	14-45	1.3±0.1	10
ZCG-16	13	16	15.5	16-50	1.5±0.1	10
ZCG-18	14.8	18	16.6	18-55	1.6±0.1	10
ZCG-20	16.6	20	19	20-60	1.7±0.2	10
ZCG-22	18.4	22	20	25-70	1.8±0.2	10
ZCG-25	20.2	25	22	28-80	2.4±0.2	10
ZCG-30	25.2	30	29.3	30-90	2.4±0.2	-
ZCG-35	29.4	35	33.7	35-100	2.8±0.2	-
ZCG-40	34.4	40	34	40-120	2.8±0.2	-
ZCG-50	44.4	50	44.5	50-150	2.8±0.2	-

Changzhou Qiaoguang Electrical Appliance Co., Ltd

Tel: 86-519-8697 2201

Fax:86-519-8697 2990

Address: No. 223, West Hehai Road, Changzhou, Jiangsu, PRC